




QR Kodu Tarayarak
Ürün Hakkında Daha Fazla
Bilgi Alabilirsiniz.

Scan the QR Code to
Access More Information
About the Product.



JUPITER D		TEKNİK BİLGİLER TECHNICAL SPECIFICATION
DERİNLİK DEPTH	mm	720
ÇALIŞMA SICAKLIĞI OPERATING TEMPERATURE	°C	M1 (-1/+5C)
UZUNLUK (YAN KAPAKLAR HARIÇ) LENGTH (WITHOUT SIDE WALL)	mm	937,5
		1250
		1875
		2500
YAN KAPAK KALINLIĞI SIDE WALL THICKNESS	mm	40 + 40

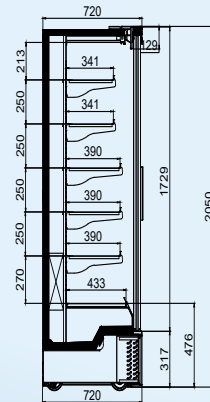

JUPITER D

Jupiter D

Yeni Nesil İçten Motorlu Cam Kapılı Duvar Reyonu New Generation Plug-In Multideck With Double Glass Door

TR

- Yeni nesil düşük enerji sınıfı üstün tasarım
- Elektronik termostat
- 2X350+3X400mm ölçülerinde 5 sıra raf ve etiketlik
- Standart yağışma ünitesi
- Çıkarılabilir kondenser ünitesi / kolay bakım
- Menteşeli veya sürgülü çift camlı kapılar
- Termostatik genişleme valfi
- T8 LED kanopi aydınlatması ve raf altı aydınlatması
- Pleksiglas cam ürün durdurucuları
- Temperli çift cam yan kapaklar
- 3M1 standartında çalışma sıcaklığı
- R404A / R449A

EN

- Superior design as remote multidecks
- Electronic Thermostat
- 2x350mm+3x400mm of shelves with ticket holders (Totaly 5 row shelves)
- Built in condensing unit with condensate water evaporator coming standart
- Pul out condensate tray /ceasy maintenance
- Hinged or sliding double glass doors
- Thermostatic expansion valve welded
- T8 LED canopy lightning&Undershelf lighting
- Perspex glass product stopper
- Tempered & double glass sidewall
- 3m1 temperature performance
- R404A / R449A

